



HEAT SHRINKABLE & INSULATING MATERIAL (TYP.). SEE NOTE 2.

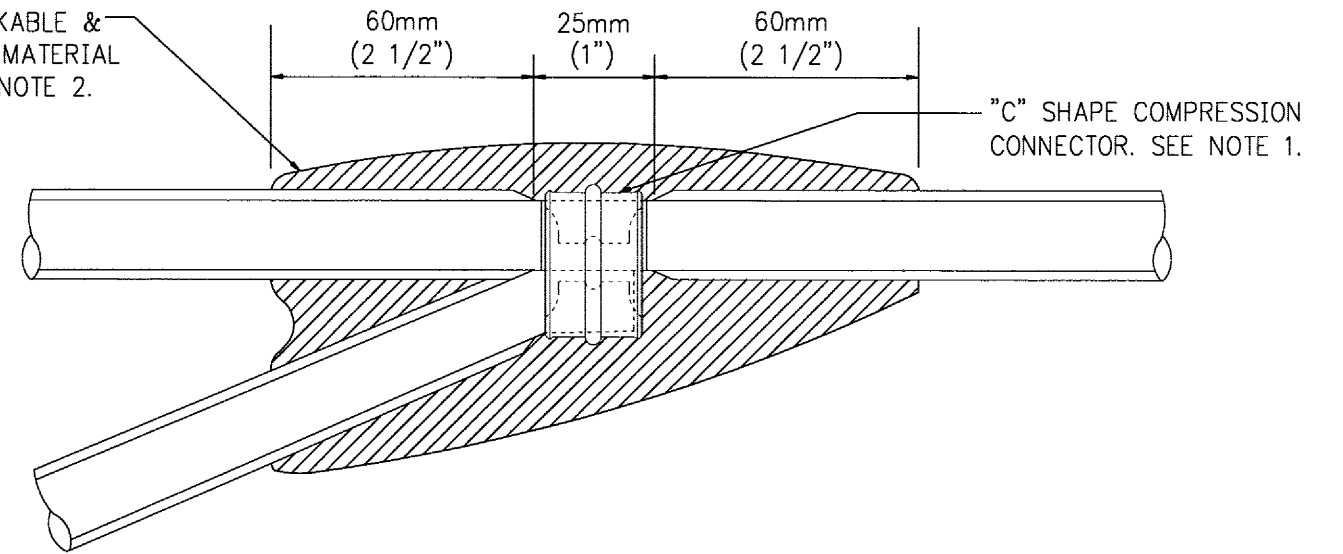

TYPE "T" SPLICE

(BETWEEN 3 FREE-END CONDUCTORS)

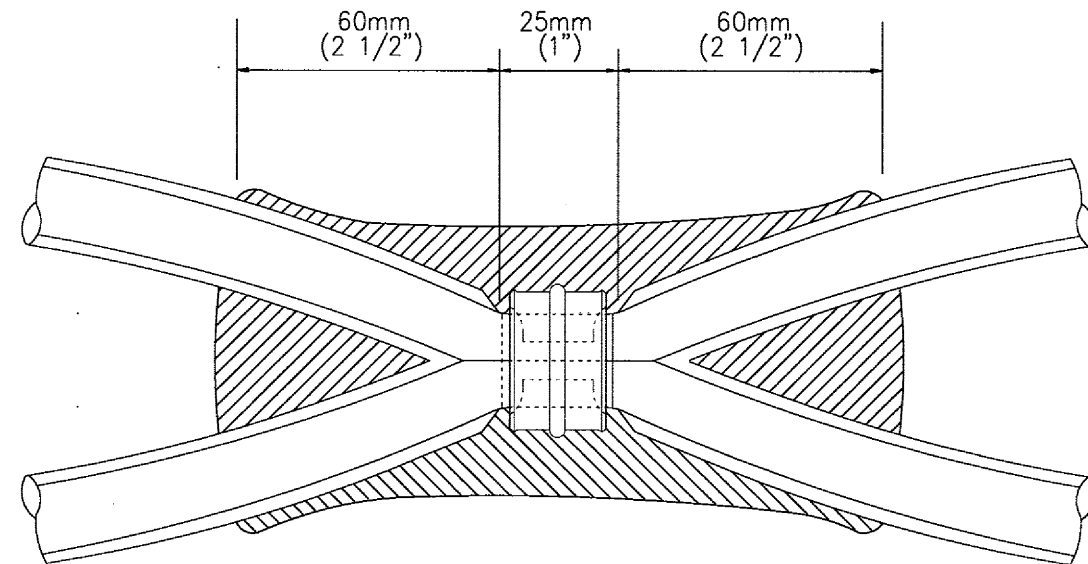

"C" SHAPE COMPRESSION CONNECTOR. SEE NOTE 1.

TYPE "X" SPLICE

(BETWEEN 4 FREE-END CONDUCTORS, ENDS TO ENDS)


NOTES:

- 1) CONNECTOR SHALL BE APPLIED WITH THE CONNECTOR MANUFACTURER APPROVED CRIMPING TOOL AND SHALL BE SOLDERED. SOLDERING MATERIAL SHALL FILL THRU ALL ACCESS HOLES.
- 2) HEAT SHRINKABLE AND INSULATING MATERIAL SHALL BE SPLICE-KOTE INSULATION SLEEVE OR 3M HEAT SHRINKABLE HEAVY WALL TUBING OR APPROVED EQUAL. APPLICATION SHALL CONFORM TO THE MANUFACTURER'S SPECIFICATIONS.
- 3) DIMENSIONS SHOWN ARE MINIMUM.
- 4) WIRE SPLICING COMBINATIONS SHALL NOT EXCEED CONNECTOR MANUFACTURER'S SPECIFICATIONS.

09

METRIC (& ENGLISH) UNITS

NO.	REVISIONS	BY	DATE	APP'D



SANTA CLARA COUNTY ROADS AND AIRPORTS DEPARTMENT

DESIGNED: TH 04/15/97
 DATE: 04/15/97
 DRAWN: TH 04/15/97
 CHECKED: 04/15/97



WORK ORDER
 LEVEL BOOK
 TRANSIT BOOK

SUBMITTED:

William A. Baker

APPROVAL:

Rolla Parsons



STANDARD DETAILS
 CONDUCTOR SPLICING

PROJECT NO.

CONTRACT NO.

FILE NO.

DRAWING NO.

E 13

SHT NO.

2 OF 2