


NOTES:

- 1) THE SPECIFIED VERTICAL CLEARANCE SHALL BE MEASURED FROM THE CENTERLINE OF THE PUSHBUTTON CONTROL TO THE FINISHED SURFACE OF SIDEWALK / WALKWAY.
- 2) HORIZONTAL MINIMUM CLEARANCE BETWEEN STANDARD/POST AND TRAFFIC LANE FACE OF CURB SHALL BE MET.
- 3) PEDESTRIAN AREA SHALL BE LEVEL.

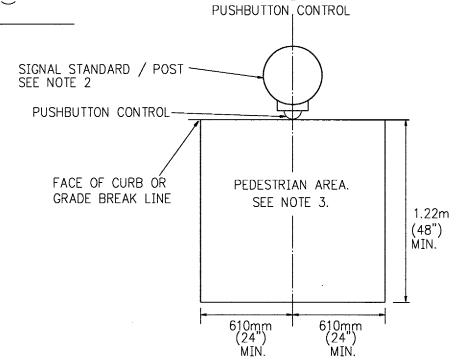

B TOP VIEW - PUSHBUTTON CONTROL MOUNTING HORIZONTAL CLEARANCE

METRIC (& ENGLISH) UNITS

	COUNT	SANTA	CLARA COUNTY	ROADS AND AIRPORTS	S DEPARTMENT
		TH 04/15/9	SUBMITTED:	PROFESSION APPROVAL	
		DESIGNED DA /15/9	TE WORK ORDER	No. E7/336	S No C17390
	1850	TH 04/15/9	E LEVEL 800K	Exp. 9 80 - 98 7	Exp. 9-30-99

STANDARD DETAILS SIGNAL MOUNTING CLEARANCE REQUIREMENTS

6A SHT NO. 1 OF 1

E

PROJECT NO. CONTRACT NO.

FILE NO.